

R-2000iC/165R (Rack mount)




Max. load capacity
at wrist: **165 kg**



Max. Reach:
3095 mm

Controlled axes	Repeatability (mm)	Mechanical weight (kg)	Motion range [°]						Maximum speed [°/s]						J4 Moment/ Inertia (Nm/kgm²)	J5 Moment/ Inertia (Nm/kgm²)	J6 Moment/ Inertia (Nm/kgm²)
			J1	J2	J3	J4	J5	J6	J1	J2	J3	J4	J5	J6			
6	± 0.2	1370	370	200	375	720	250	720	115	110	125	180	180	260	940/89	940/89	490/46

Working Range

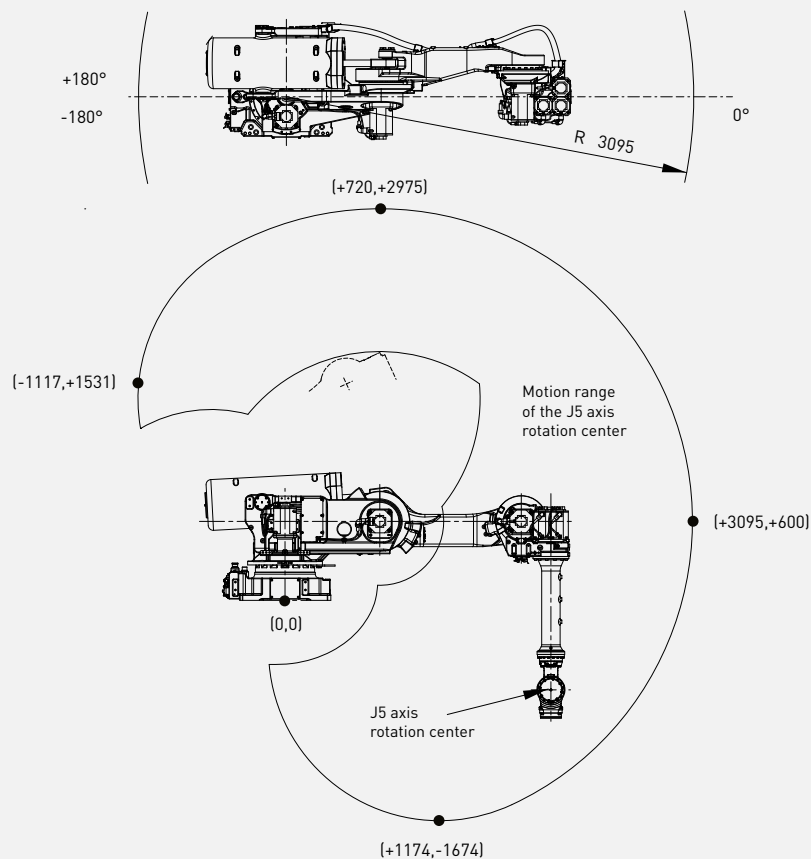

Robot

	R-2000iC/165R
Robot footprint [mm]	771 x 610
Mounting position Floor	●
Mounting position Upside down	-
Mounting position Angle	-



Controller

	30iB
Open air cabinet	-
Mate cabinet	-
A-cabinet	●
B-cabinet	○
iPendant Touch	●

Electrical connections

Voltage 50/60Hz 3phase [V]	380-575
Voltage 50/60Hz 1phase [V]	-
Average power consumption [kW]	2.5

Integrated services

Integrated signals on upper arm In/Out	8/8
Integrated air supply	2

Environment

Acoustic noise level [dB]	70.5
Ambient temperature [° C]	0-45

Protection

Body standard/optional	IP54 /IP56
Wrist & J3 arm standard/optional	IP67

● standard ○ on request - not available [] with hardware and/or software option